

# I PATROL + COPPO

## LIFELINE ON SUPPORT FOR ROOFS WITH FAUX TILES

### COMPLETE

The package includes fasteners and cellular rubber gaskets, to ensure roof waterproofing.

### ADAPTABLE

Pre-drilled plate with holes at different distances to suit various types of sheet metal.

### FAST

Quick assembly upon the completion of roofing with just a few tools.

EN  
795:2012  
C

CEN/TS  
18415:2013

UNI  
11578:2015  
C




MAXIMUM NUMBER  
OF USERS




LOAD DIRECTION



TYPES OF  
APPLICATION



## PATROL LIFELINE COMPONENTS

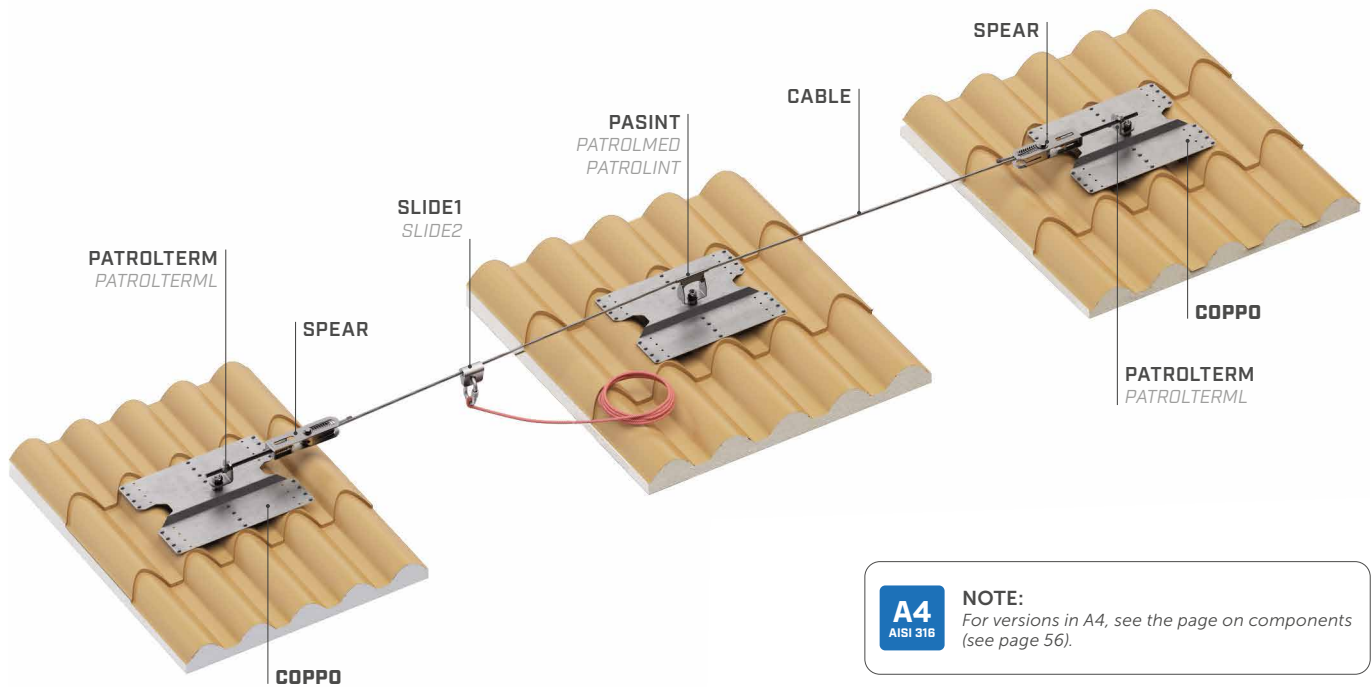



**A4**  
AISI 316

**NOTE:**  
For versions in A4, see the page on components (see page 56).

## TECHNICAL DATA\*

substructure	minimum thickness	fastening systems included
 Fe	0,5 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 24) 
 Al	0,7 mm	

			SPEAR		
			EN 795:2012 C	CEN/TS 18415:2013	UNI 11578:2015 C
users		no.			
minimum span	$x_{min}$	[m]	2		
maximum span	$x_{max}$	[m]	7,5		
maximum deflection	$y_{max}$	[m]	1,44		

\* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standard referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

## COPPO | CODES AND DIMENSIONS

CODE	description	material		B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs	
COPPO	support for faux tile roofing panel	AISI 304 stainless steel grade 1.4301	<b>A2</b> AISI 304	166 - 200 6 9/16 - 8	65 2 9/16	322 12 11/16	1	