



DRYWALL SCREW

OPTIMISED GEOMETRY

Bugle head and phosphate-coated steel; ideal for fastening drywall panels.

SHORT PITCH THREAD

Fully short-pitch threaded screw, ideal for fastening on sheet metal supports.

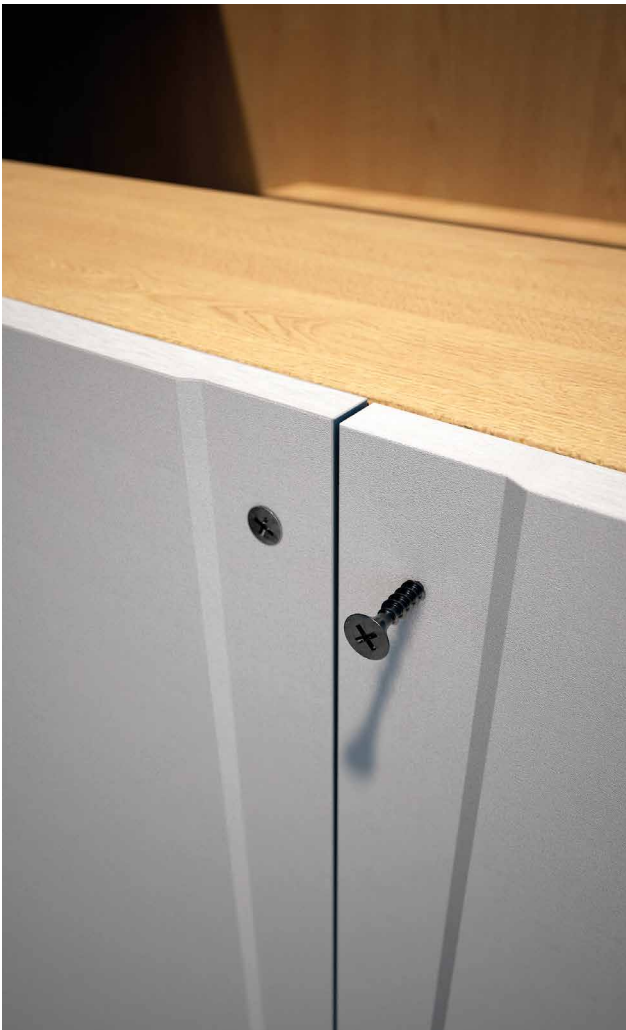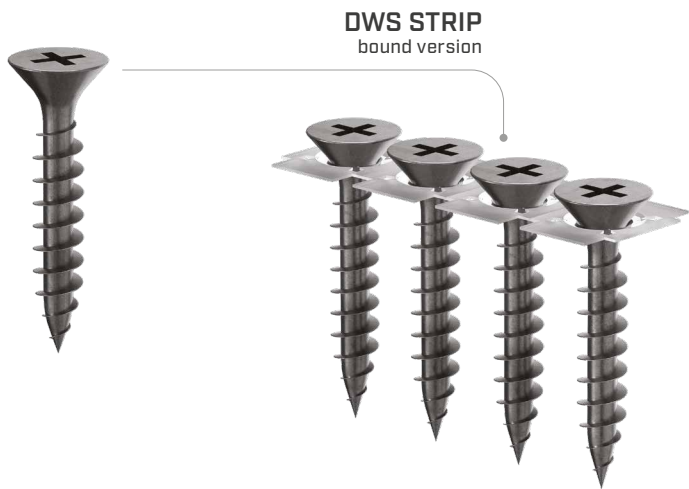


CODES AND DIMENSIONS

DWS - bulk screws


| d <sub>1</sub><br>[mm]<br>[in]                                                      | CODE                      | L       |        | description              | pcs  |
|-------------------------------------------------------------------------------------|---------------------------|---------|--------|--------------------------|------|
|                                                                                     |                           | [mm]    | [in]   |                          |      |
|  | 3,5<br>0.14<br>#6<br>PH 2 | FE20001 | 25     | 1                        | 1000 |
|                                                                                     |                           | FE20005 | 35     | 1 3/8                    | 1000 |
|                                                                                     |                           | FE20010 | 45     | 1 3/4                    | 500  |
|                                                                                     |                           | FE20015 | 55     | 2 3/16                   | 500  |
| 4,2<br>0.17<br>#8<br>PH 2                                                           | FE20020                   | 65      | 2 9/16 | Sheet Metal Substructure | 200  |

DWS STRIP - bound screws

| d <sub>1</sub><br>[mm]<br>[in]                                                      | CODE                      | L          |      | description | pcs   |
|-------------------------------------------------------------------------------------|---------------------------|------------|------|-------------|-------|
|                                                                                     |                           | [mm]       | [in] |             |       |
|  | 3,9<br>0.15<br>#7<br>PH 2 | HH10600401 | 30   | 1 3/16      | 10000 |
|                                                                                     |                           | HH10600402 | 35   | 1 3/8       | 10000 |
|                                                                                     |                           | HH10600403 | 45   | 1 3/4       | 10000 |
|                                                                                     |                           | HH10600404 | 30   | 1 3/16      | 10000 |
|                                                                                     | 0.15<br>#7<br>PH 2        | HH10600405 | 35   | 1 3/8       | 10000 |
|                                                                                     |                           | HH10600406 | 45   | 1 3/4       | 10000 |
|                                                                                     | 3,9<br>0.15<br>#7<br>PH 2 | HH10600407 | 30   | 1 3/16      | 1000  |
|                                                                                     |                           | HH10600408 | 35   | 1 3/8       | 1000  |

Compatible with nailgun HH3371

GEOMETRY



DIAMETER [in]  
0.14 0.17 0.48

LENGTH [in]  
1 2 9/16 8

EXPOSURE CONDITION



ATMOSPHERIC CORROSIVITY



WOOD CORROSIVITY



MATERIAL

