

SEAL BAND | SEAL SQUARE

SINGLE-SIDED TAPE FOR INDOOR USE



D
DIN 4108-7
DIN 4108-11

EFFECTIVE

The preformable carrier simplifies and enhances the sealing of concave or convex corners and edges.



SQUARE VERSION

Ideal for small point seals or holes for the blowing technique, where precision is required.



COMPOSITION

- ① support: reinforced paper with protective film
- ② glue: acrylic dispersion without solvents
- ③ release liner: silicone coated paper


CODES AND DIMENSIONS

SEAL BAND

CODE	liner [mm]	B [mm]	L [m]	liner [in]	B [in]	L [ft]	
SEAL60	60	60	25	2.4	2.4	82	10
SEAL1248	12/48	60	25	0.5/1.9	2.4	82	10
SEAL3030	30/30	60	25	1.2/1.2	2.4	82	10

SEAL SQUARE

CODE	B [mm]	H [mm]	L [m]	B [in]	H [in]	L [ft]	pcs/roll	
SEAL180	180	180	36	7.1	7.1	118	200	1

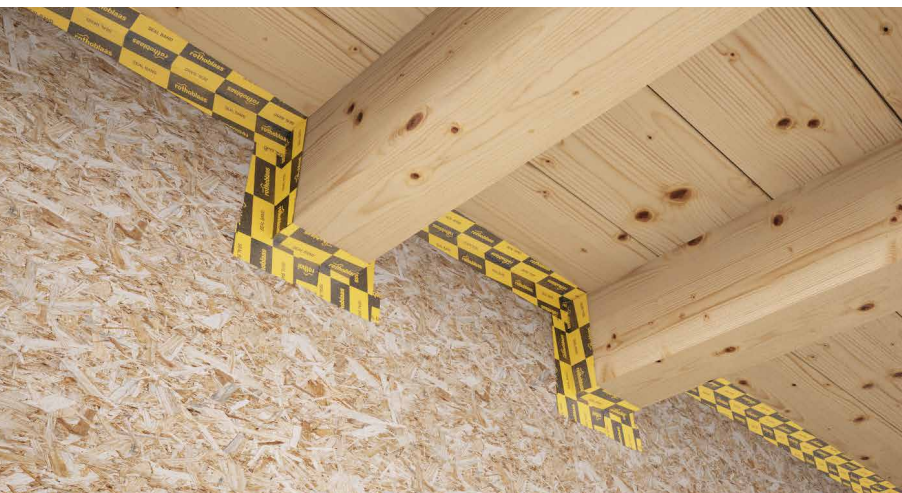

FAST INSTALLATION

Versions with pre-cut liner are available for quick and easy installation.

SAFE

Reinforced paper support, ideal for indoor use; airtightness guaranteed over time.

TECHNICAL DATA

Properties	standard	value	USC units
Thickness	EN 1942	0,3 mm	13 mil
Adhesion strength on steel at 90°	ISO 29862	≥ 35 N/25 mm	≥ 8 lbf/in
Adhesion strength on OSB at 90° after 10 minutes	EN 29862	3,5 N/10 mm	2.0 lbf/in
Adhesion strength on OSB at 180° after 10 minutes	EN 29862	11,0 N/10 mm	6.3 lbf/in
Adhesion strength (average) on membrane in PP after 24 hours ⁽¹⁾	EN 12316-2	15,0 N/50 mm	1.7 lbf/in
Shear adhesion strength of the joint on membrane in PP after 24 hours ⁽²⁾	EN 12317-2	120,0 N/50 mm	13.7 lbf/in
Water vapour transmission (Sd)	EN ISO 12572	6 m	0.58 US Perm
Application temperature ⁽³⁾	-	0/+40 °C	+32/+104 °F
Resistance to temperature	-	-30/+100 °C	-22/+212 °F
Storage temperature ⁽⁴⁾	-	+15/+25 °C	+59/+77 °F
French VOC classification	ISO 16000	A+	-
VOC emissions	EN 16516	very low	-
Solvents	-	no	-

⁽¹⁾Minimum required value according to DTU 31.2 P1-2 (France): 15 N/50 mm.



⁽²⁾Minimum required value according to DTU 31.2 P1-2 (France): 40 N/50 mm.

⁽³⁾ On dry support and at a temperature > 0 °C. The absence of condensation or frost on the surface must be guaranteed.

⁽⁴⁾Store the product in a cool, dry place for no more than 12 months.

♻️ Waste classification (2014/955/EU): 08 04 10.

FIELDS OF APPLICATION

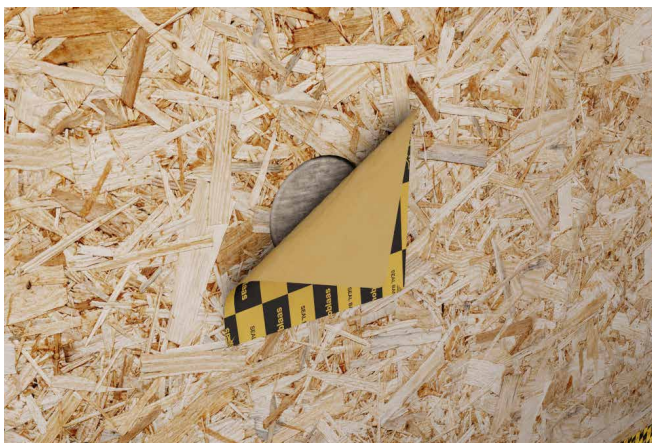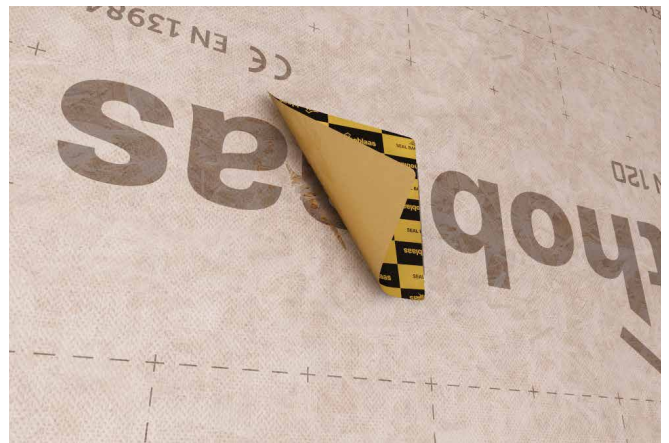

PRODUCT RANGE



SEAL60



SEAL1248



SEAL3030






SEAL180

RECOMMENDATIONS FOR INSTALLATION



CORNER DETAIL

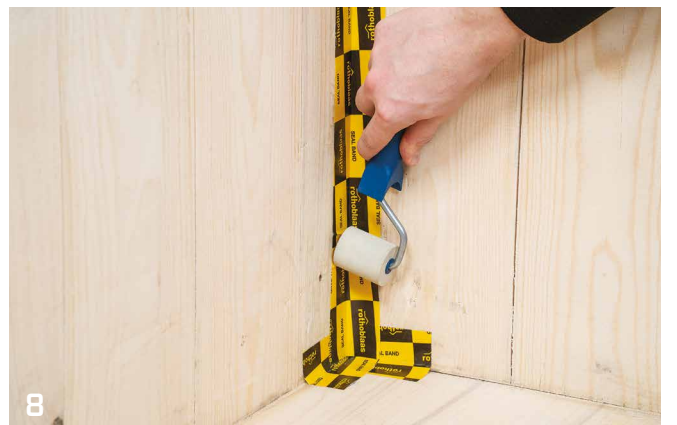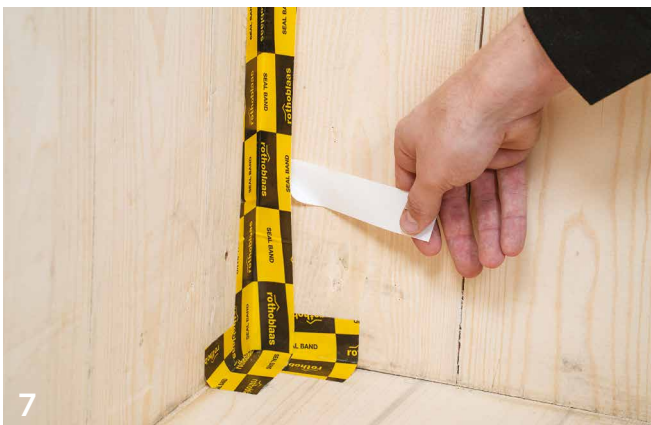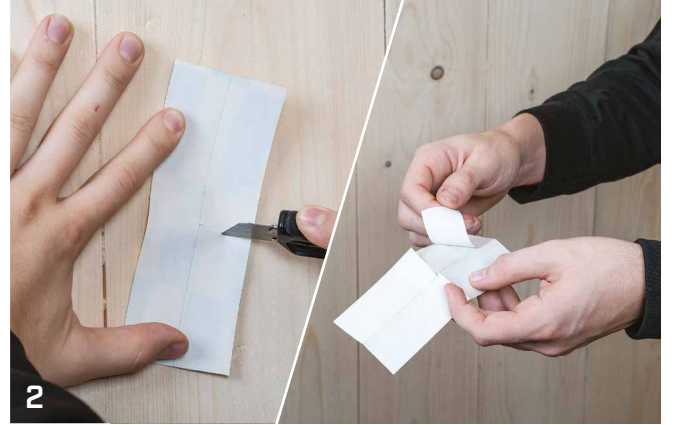

2 MARLIN, CUTTER

4 ROLLER



BEAM SEAL DETAIL



1 MARLIN, CUTTER

3 ROLLER

WINDOW HOLE SEALING DETAIL

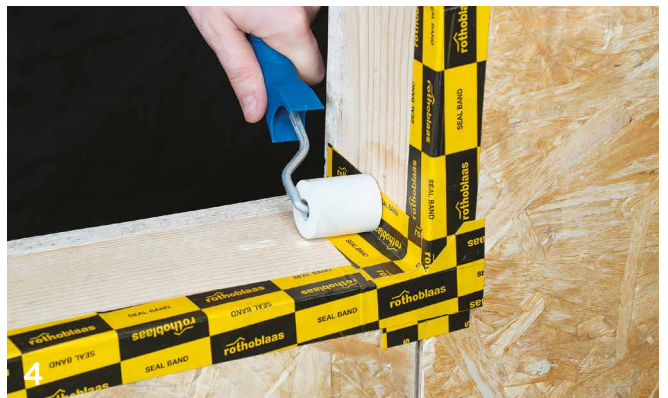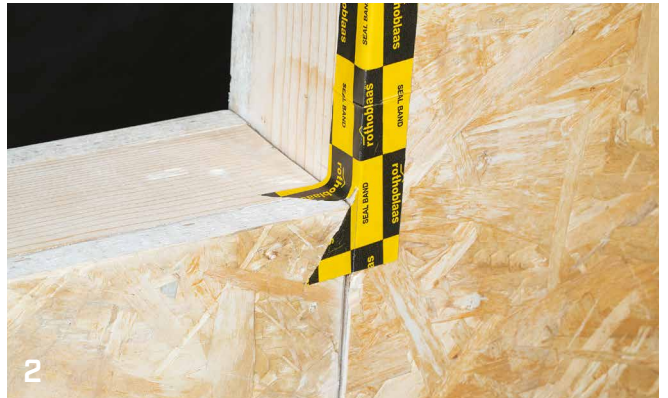

1 MARLIN, CUTTER

4 ROLLER